

SPR™

SPIRAL WOUND
PIPE LINER

Structural liner for circular and non-circular gravity pipelines between 800 mm to 5500 mm


800 MM - 5500 MM



ROUND/NON-ROUND



FULLY STRUCTURAL

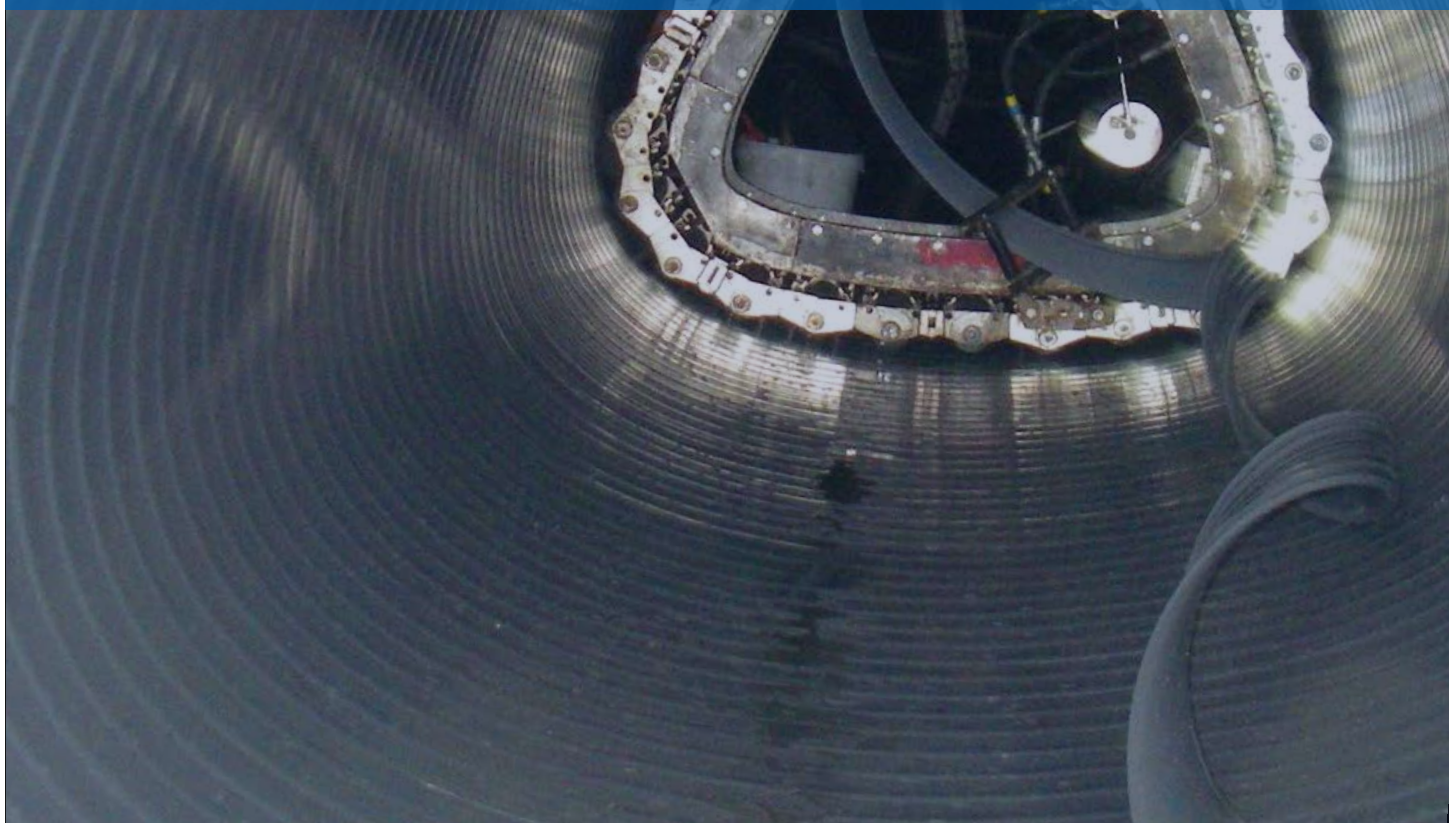

SEKISUI

Spiral Wound Technology Overview



Gravity
Pipe Renewal

Live Flow
Installations

Zero
Chemicals

Spiral Wound pipe liners are a structural rehabilitation solution for gravity pipe applications from 150 mm - 5500 mm. Utilizing machinery, a continuous strip of PVC/HDPE is constructed as a uniform liner. Spiral Wound lining is 100% trenchless; only existing access points are used for rehabilitation.



Spiral Wound

Lining Methods





SPR™

Technology Overview

800 mm - 5500 mm
Diameters

Round &
Non-Round Shapes

Fully
Structural

SPR™ is a Spiral Wound pipe lining method for large diameter sewers, storm drains and culverts. SPR™ lines both round and non-round shapes, providing fully structural rehabilitation. The machine travels the length of the pipeline while constructing the liner at a fixed diameter.

SPR™ is an entirely mechanical process that does not require curing or chemicals.



Installation

A steel-embedded PVC profile strip is wound into the pipe by a traverse winding machine. The machine travels the length of the pipeline while constructing the liner at a fixed diameter. Grout is then introduced to fill the annular space; either part of the structural liner or just as a gap filler to uniformly transfer loads onto the liner. Grout type depends upon dimensions of the pipe and overall project conditions.

Process



SEKISUI



www.sekisui-spr.com
sekisui.info@sekisui-spr.com



+49-211-36977-61

FOLLOW OUR CHANNELS FOR THE LATEST ON
SPIRAL WOUND PIPE LINING

